

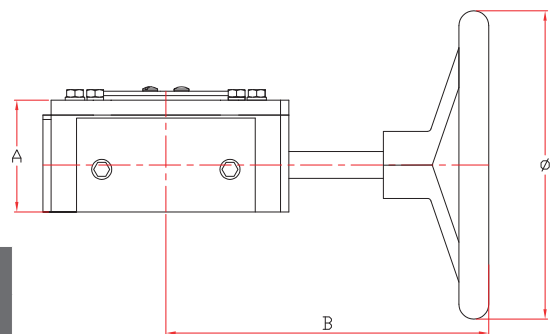


GEARBOX / 3700

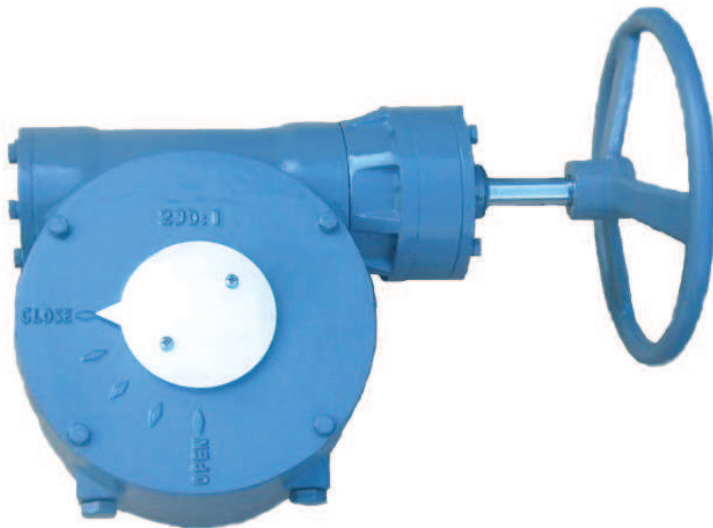

DN	Ø	A	B	C	TS EN ISO 5211			GxG	Reduction Rate	Weight KG
					Flange Size	D	E			
40	190	60	160	47	F 07	70	M8	11x11	24 : 1	4,5
50										
65										
80										
100	190	65	165	45	F 07	70	M8	14x14	24 : 1	4,9
125										
150	190	65	165	45	F 07	70	M8	17x17	24 : 1	5,1
200	295	70	235	67	F 10	102	M10	17x17	30 : 1	8,2
250	295	70	235	67	F 10	102	M10	22x22	30 : 1	8,3
300	295	90	230	70	F 10	102	M10	22x22	50 : 1	10,6
350	295	90	230	70	F 12	125	M12	22x22	50 : 1	14,1
400	390	110	240	120	F 14	140	M16	27x27	80 : 1	25,15

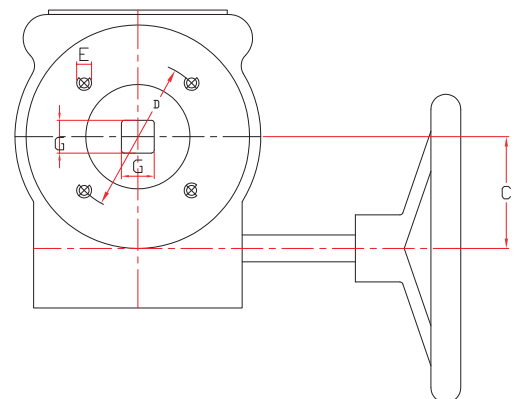

FEATURES

- FAF3700 Gearbox is used for decreasing the torque needed to rotate the stem through the help of gears with ratio.
- While the open-close torque of the valve with gearbox decreases, the number of turns needed to open-close the valve increase.
- Attention should be paid on the connection dimensions and gearbox ratio when selecting an actuator for the valve
- The DN dimensions and gearbox types mentioned on the table are given according to the general applications
- It is advised to receive support from FAF Valve technical staff while selecting gearboxes